



ARKTURA



# Particle® Urban

---


Ceiling & Wall **Panels**



*Fueling Possibilities®*


# Our Key Features

Elevate any space with the elegant, straightforward design of Particle® Urban. Joining the Particle® collection of micro-perforated designs, Urban offers designers a no-frills linear design for walls and ceiling panels. These beautiful uniform micro-cutouts make a huge design impact in spaces large or small. Specify this new design in our standard powder-coated finishes or upgrade to our premium finishes designed in collaboration with Pure+FreeForm.

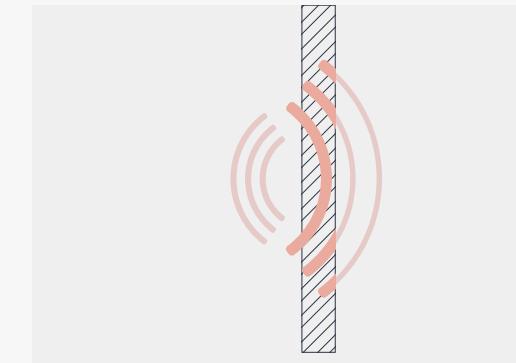


## Reduce Noise & Enhance Acoustics

Particle® panels are preconfigured micro-perforated solutions designed with a dynamic array of criteria and effects in mind to provide a seamless result. Choose from our library of patterns to uniquely impact your project.

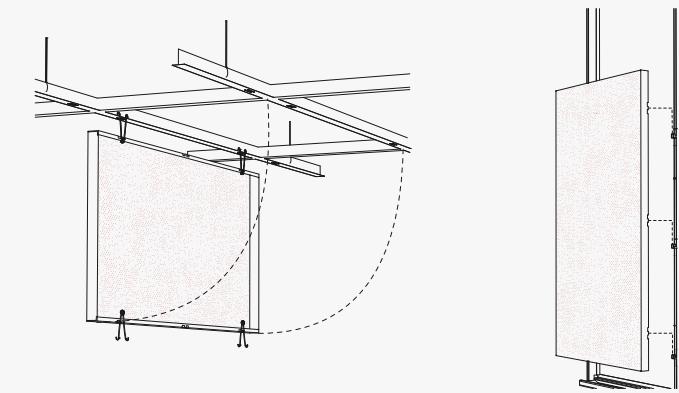


## Easy Installation & Access

Particle® panels offer easy install and access across walls and ceilings through quick torsion spring attachment to standard grid systems and a simple hook-on attachment to our Vertika® channel system.

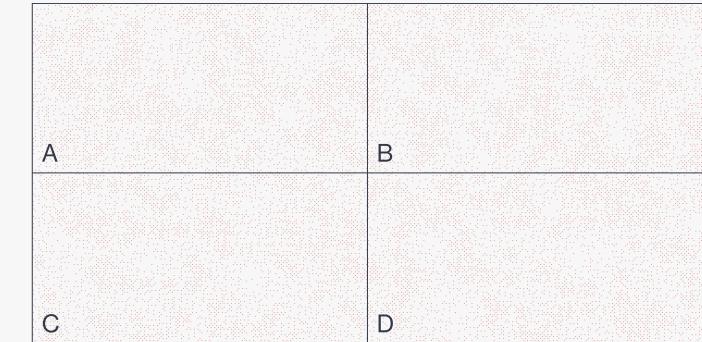


## Preconfigured Solutions

Particle® panels are preconfigured micro-perforated solutions designed with a dynamic array of criteria and effects in mind to provide a seamless result. Choose from our library of patterns to uniquely impact your project.

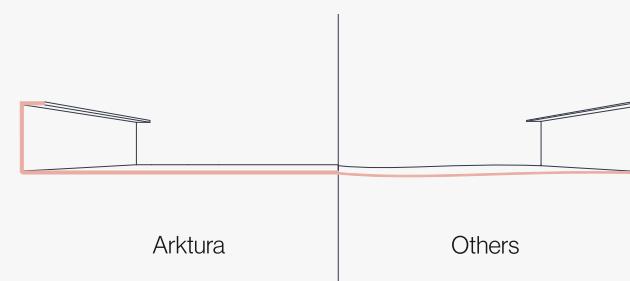

## Superior Flatness & Strength

Particle® panels are manufactured from aluminum that is, on average, 50% thicker than others, which, in combination with our precision processes, results in unrivaled flatness.

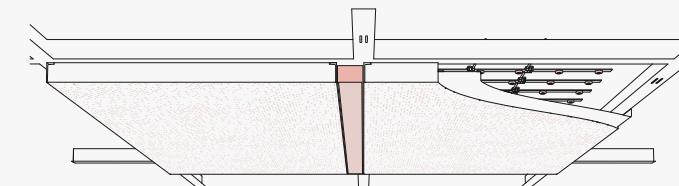

## Integrated Lighting Options

Integrate illumination and lighting effects to your projects with Arktura's offering of lighting solutions such as InLine or Backlight.




Scan the QR or Click to Learn More about Particle®

# Inspiration



Create Dramatic Immersion with Seamless Wall to Ceiling Transitions

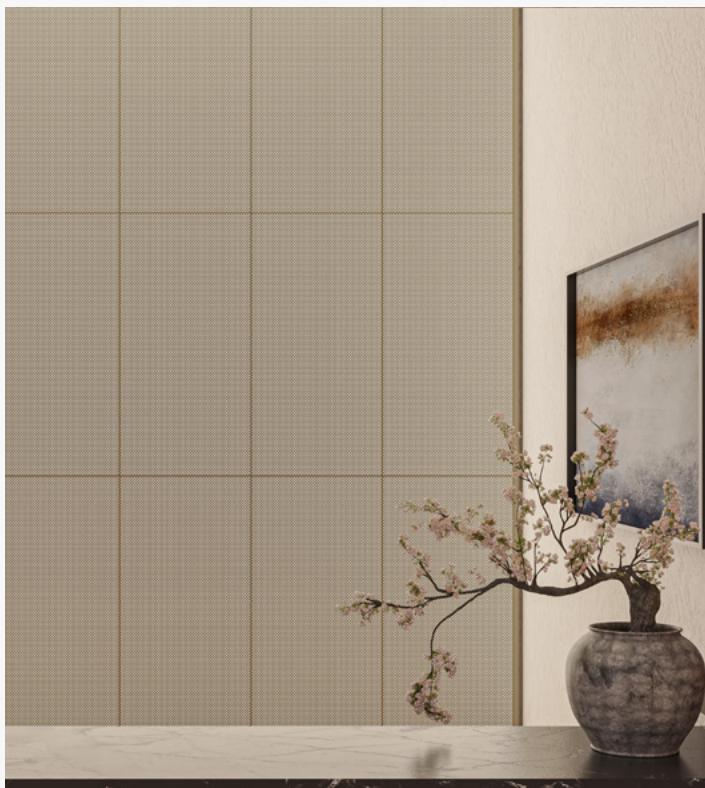

Array Panels to add Depth and Texture to Spaces



Subtle, Yet Impactful Micro-Perforated Design



# Overview

1 Understanding the System

2 Optional Accessories


3 Available Finishes

4 Product Specifications

## 1 Understanding the System

### Standard Panel

Particle® is a modular accessible aluminum panel system designed to work with torsion grid. Customization is available.

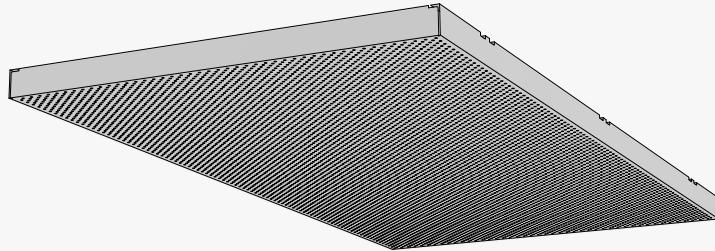

### Seamlessly Join Walls & Ceilings

Particle® easily transitions from one plane to another and around corners.




## 1 Understanding the System

### Understanding the Panel

The pattern surface is created using an unique tile in a specific arrangement that minimizes visual repetition across your space.


Panel A: 10% Open

### Ceiling Section




### Panel Configuration, Wall or Ceiling

#### Wall Section

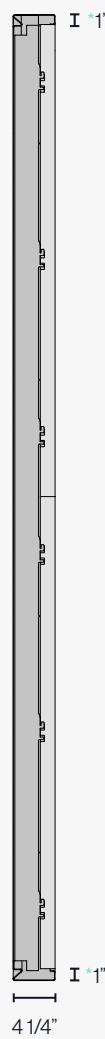

\* Vertika® Trim

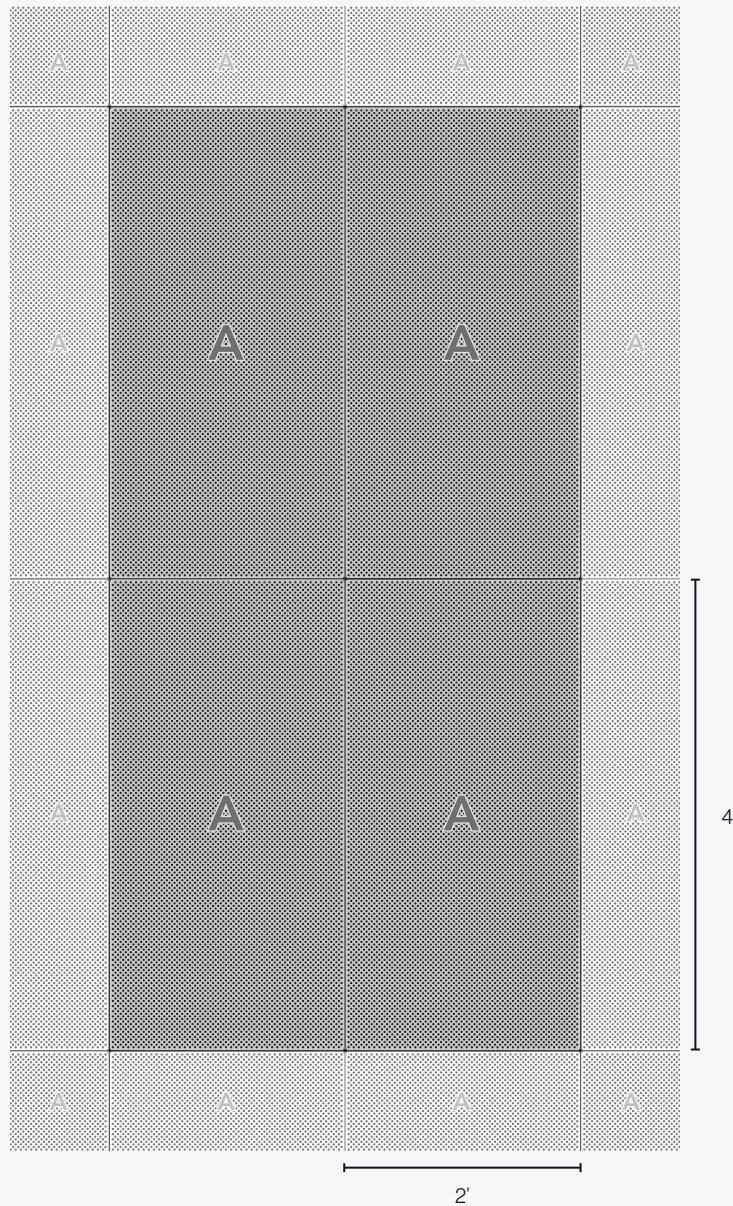

! All dimensions nominal.


## 1 Understanding the System

### Accessory Options - Ceiling

- Frosted light diffusing backer
- Non-woven acoustic fabric backer
- Backlight
- InLine downlight



 Check out our Configuration examples on PAGE 10.

\* A Specific Inline light panel is used to accommodate the width of the fixture within the 2' width.

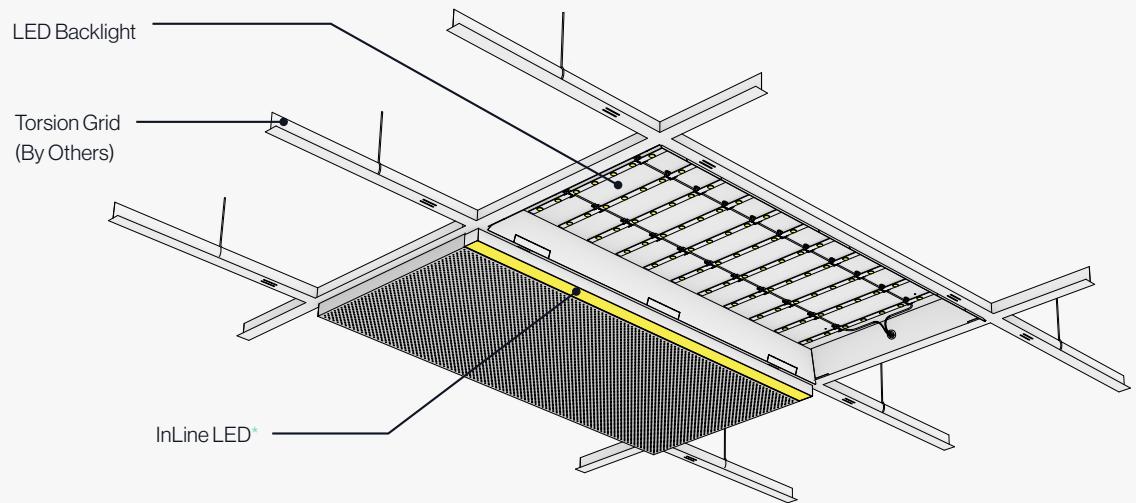


### Torsion Spring Adapter Clip

Interested in using standard t-grid?  
Use our Torsion Spring Adapter Clip.

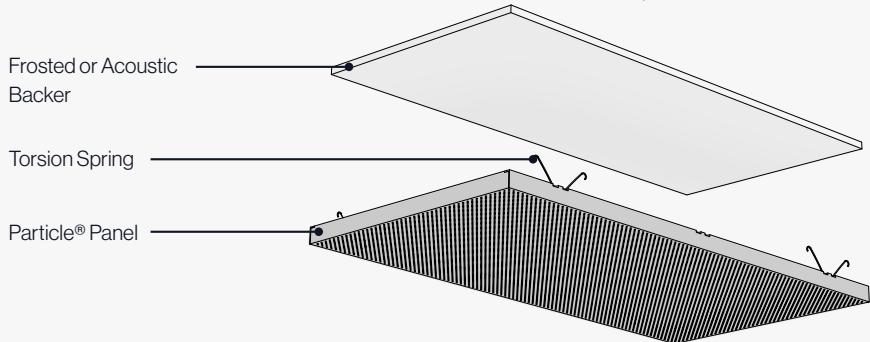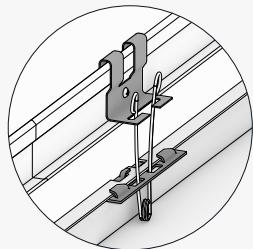

### Attachment System - Ceiling

Torsion Spring clips allow for rapid install and easy access for maintenance above the grid post install.

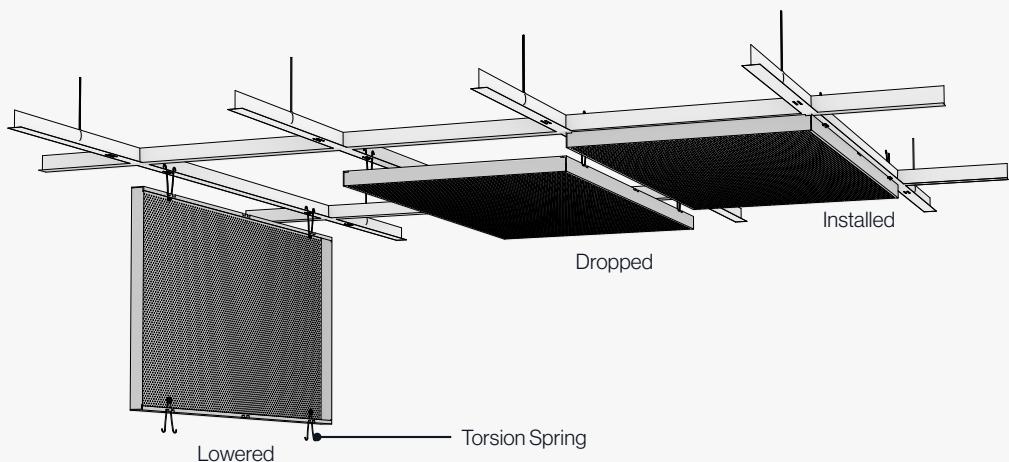


## 1 Understanding the System

### Accessory Options - Wall

- Frosted light diffusing backer
- Non-woven acoustic fabric backer
- Backlight
- InLine light


 Check out our Configuration examples on PAGE 10.

\* A Specific Inline light panel is used to accomodate the width of the fixture within the 2' width.

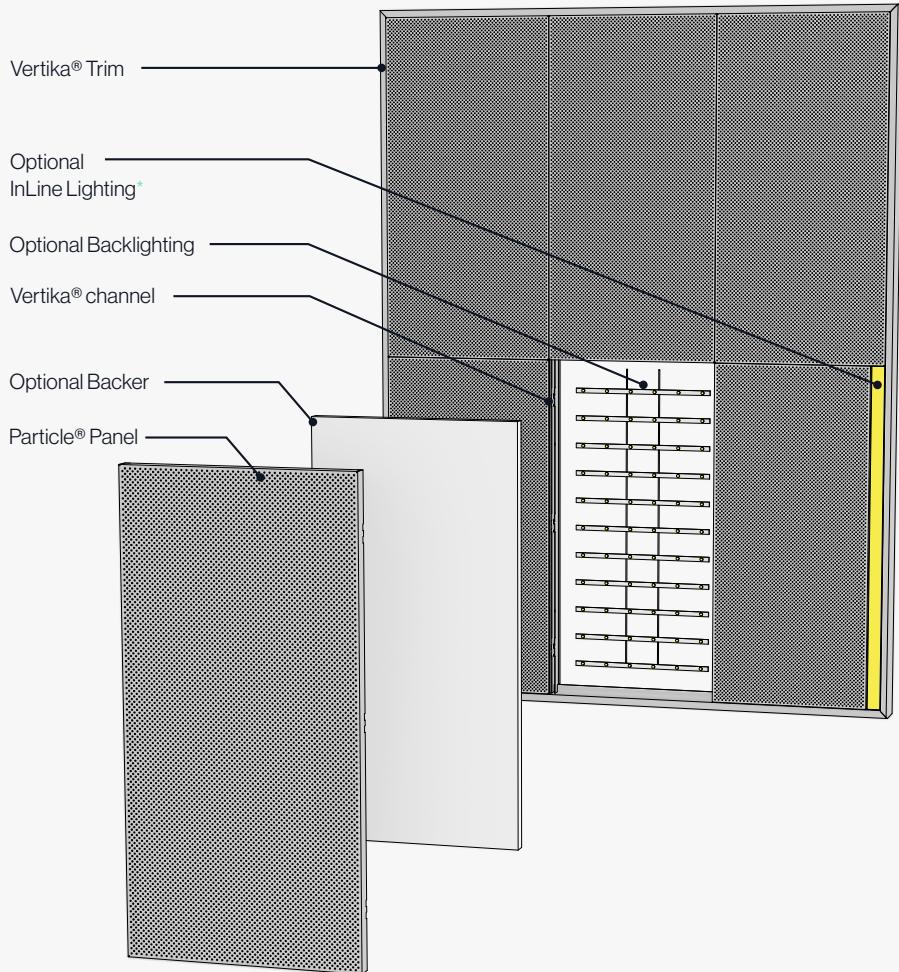

### Attachment System - Wall

Panels are easily installed or removed by sliding onto or lifting off from the system's Vertika® channel hooks.

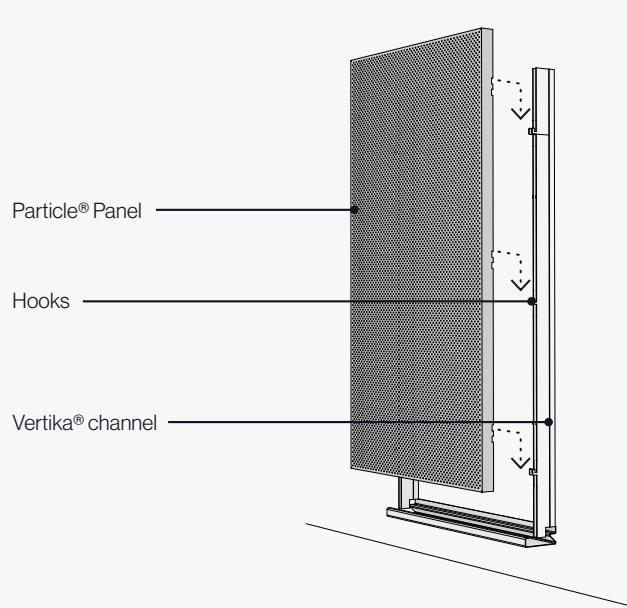

## 2


## Optional Accessories

### Lighting



#### Backlighting


Arktura Backlighting allows you to fully illuminate your ceiling and wall panel installs, creating beautiful evenly lit surfaces. These fixtures are available in high and low output versions, both dimmable. See Backlighting specs details on PAGE 14.

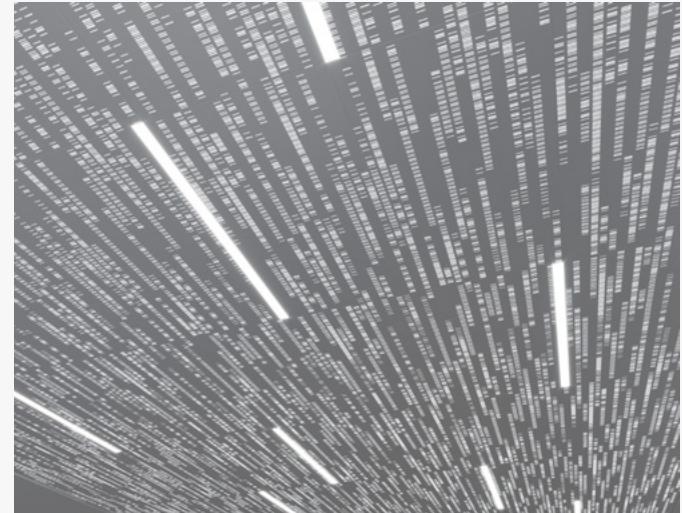

#### InLine Lighting


Our InLine Light sits flush with the face of the panels while conveniently attaching to the bottom of the grid. The fixture is available in 4' and 8' lengths. A special side-light Vapor® panel allows the light to straddle its 4' edge while staying within a 24" overall width. See InLine Lighting specs details on PAGE 16.

### Backers

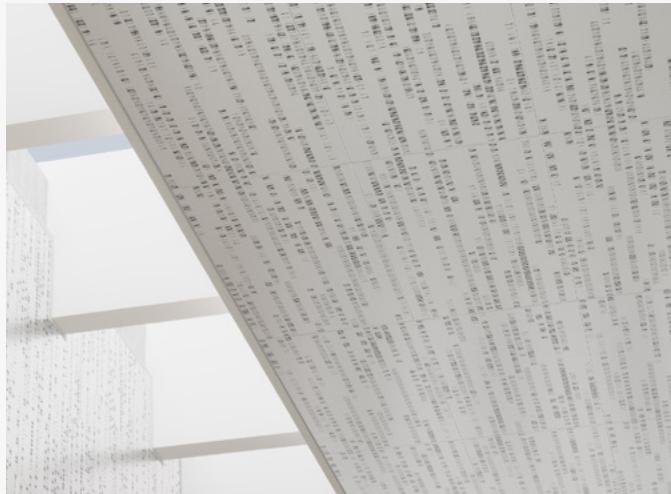

#### Acoustic Backer

We offer various options of non-woven acoustic fabric panel inserts to achieve a variety of NRC ratings. Please refer to our True NRC® table of ratings.

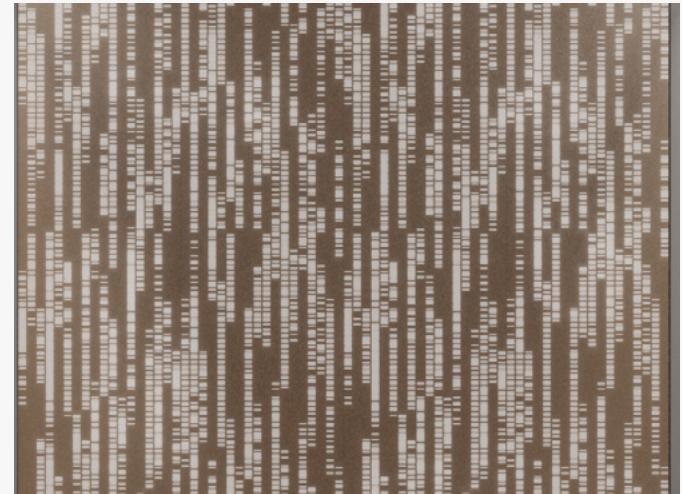

#### Translucent Backer

Our proprietary light diffusing backers can be used to create a functional or decorative lighting effect in any space.

 Illustrative images. Patterns may not match the product.









## ② Optional Accessories

### Possible Configurations

Refer to the chart and corresponding diagrams below for available configuration options.

	No Backer	Translucent Backer	Non-Woven Acoustic Backer
No light	A	B	C
Backlight	D	E	
InLine	F	G	H

 Looking to combine backlight with acoustic performance in the same panel? Check out our VaporSoft® line.

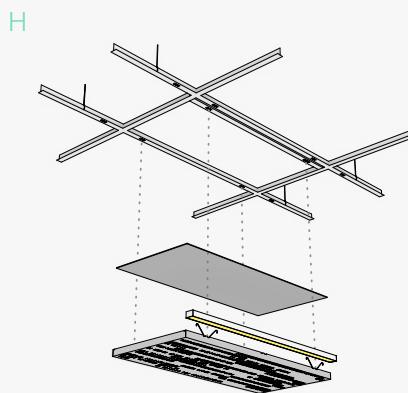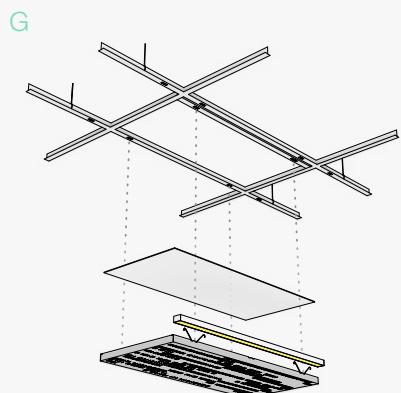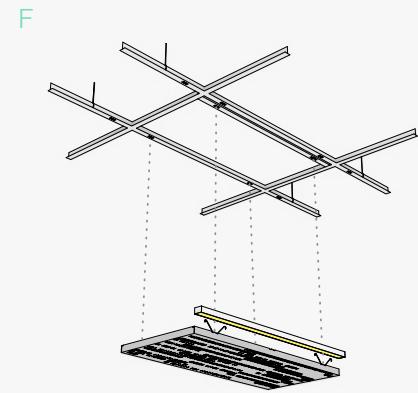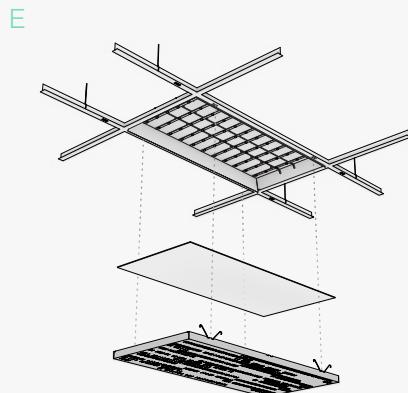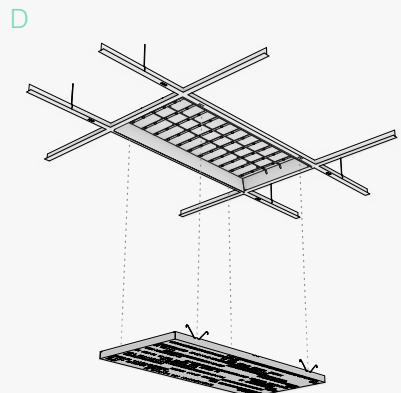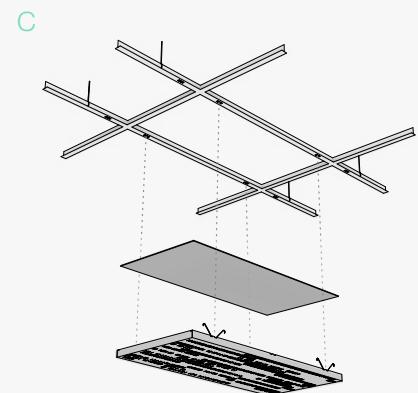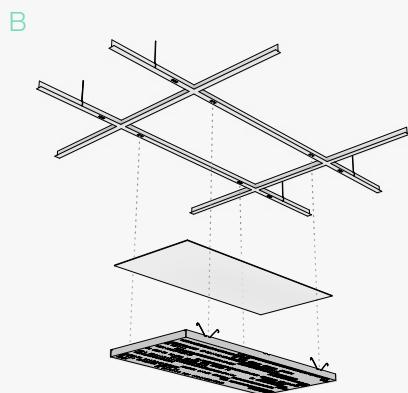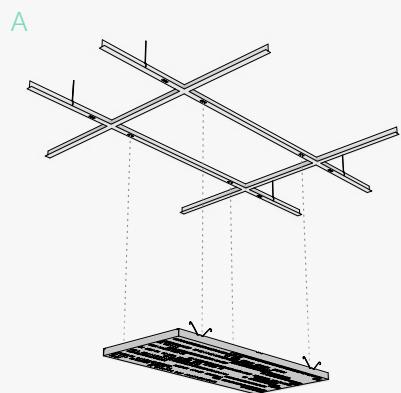

 Illustrative diagrams. Patterns may not match the product.

### 3 Available Finishes

#### Aluminum Panel

##### Powder Coat

Standard Finish



##### Powder Coat

Premium Metallic Finish



##### Custom Powder Colors

We offer premium non-stock RAL and custom color match options as well. Contact your sales rep for more information.




#### Premium Finish

x PURE+FREEFORM

##### Patinas



##### Wood Texture

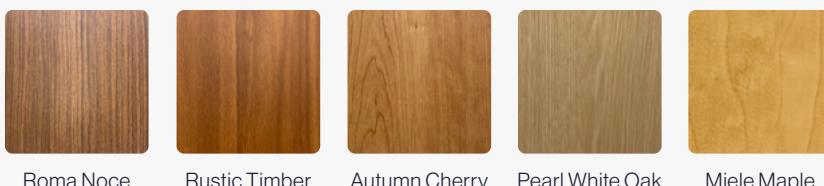

\* This color was designed to pair with Armstrong color "WH" grid and trim.


All premium and standard finishes shown are designed for interior specifications. Products may be specified for exterior use, and with alt treatments required by local code or facility, including custom color match or specialty finishes. Any changes to specification from interior standard or interior premium will result in a custom powder coat fee.

### ③ Available Finishes

#### Optional Translucent Backer

##### **Polycarbonate**

Available in interior and UV  
stable exterior options.



Frosted

#### Optional Acoustic Backer

##### **Non-Woven Acoustic Fabric**

Standard  
(0.27mm thick textile-like  
material)



White



Black

## 4

## Product Specifications &amp; Certifications


## System Specs

<b>Panel Size (WxHxD)</b>	2' x 4' x 11/2"
<b>Material</b>	Aluminum
<b>Openness in Plan</b>	10%
<b>Fire Rating</b>	ASTM E84 - Class A
<b>Acoustics</b> (with optional non-woven acoustic backer)	True NRC® 0.80: Ceiling ; E-300 Method True NRC® 0.80: Wall ; F-70 Method
<b>Ceiling Attachment</b>	Torsion Grid (By Others)
<b>Wall Attachment</b>	Vertika® Wall (Refer to Vertika® Brochure)
<b>Accessibility</b>	Torsion Spring Hinge
<b>Trimmability</b>	Yes, per installation manual
<b>Accessories</b>	Non-woven acoustic backer, Translucent Backer, Backlight, InLine Light


# Arktura Backlighting Specs

Available in dimmable low and high output variations, gives you the power to illuminate spaces and create dynamic visual effects.

## Ceiling

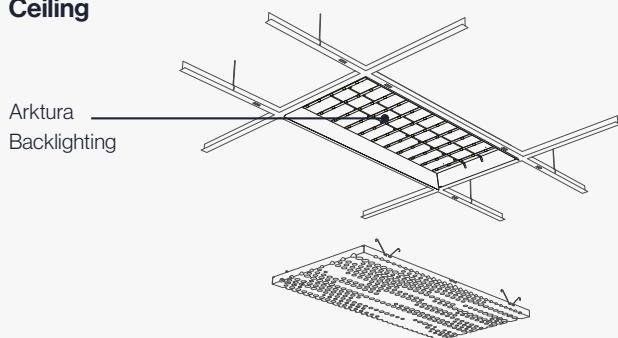

## Vertika® Wall

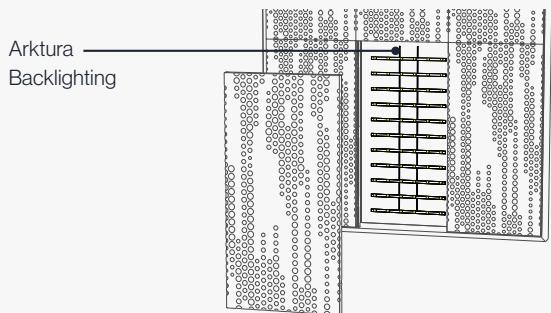


## Specs


Product Features	Arktura Backlighting Eco 2x4 Panel	Arktura Backlighting 2x4 Panel
<b>Power Consumption</b>	18W 24VDC .75A	65W 24VDC 2.7A
<b>Delivered Lumens</b>	Please Reference Next Page for Specific Openness by Pattern	
<b>CRI</b>	90+	
<b>Color Temperatures</b>	3000K, 3500K, 4000K	
<b>Size (LxWxD)</b>	24"x48"x3 1/4"	
<b>Optics/Beam Angle</b>	160° Batwing Lens Per LED	
<b>Operating Temperature</b>	-20C - +50°C (-4F - +122°F)	
<b>Dimming Options</b>	TRIAC/Phase, ELV, MLV, 0-10V, 1-10V When Paired with Arktura LED Driver	
<b>Cable</b>	Factory Installed Plenum Rated CL3P Cable, 16AWG 10ft Whip	
<b>IP Rating</b>	IP64	
<b>Environment</b>	Suitable for Wet, Damp or Dry locations	
<b>Markings</b>	ETL Listed, Complies with UL 2108 & CSA C22.2#250.13:2020 Ed.4+U1	
<b>Lifetime</b>	L70 - 50,000 hours	
<b>Warranty</b>	5 Years, Limited	

## Sections - Ceiling

Front view

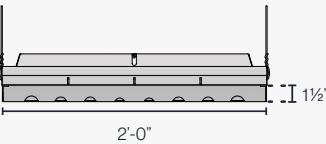


Side view

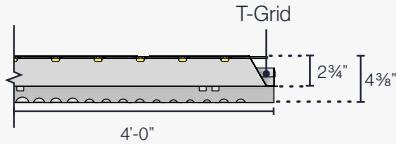

## Sections - Wall

Top view

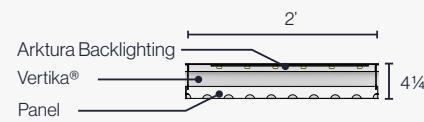

Side view




## Photometric

Located At Horizontal Angle = 0, Vertical Angle = 0

**#1** - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)

**#2** - Horizontal Cone Through Vertical Angle (0) (Through Max. Cd.)

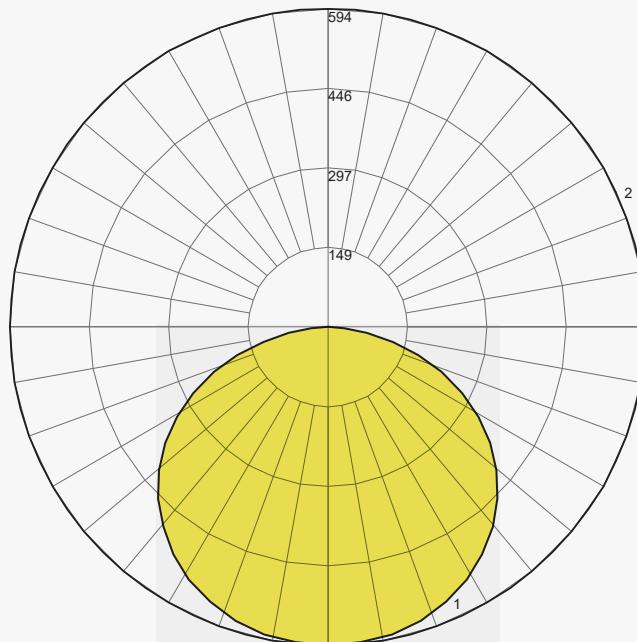

\* Represents a 40% Openness Pattern.

Illustrative images. Patterns may not match the product.

# Arktura Backlighting % Open & Lumen Output

## Backlighting % Open & Lumen Output

Product	% Open	18W Arktura Backlight Eco Lumen Output	65W Arktura Backlight Lumen Output
Vapor® Cora	68%	1176	3361
Vapor® Bloom	20%	400	1118
Vapor® Breeze	23%	457	1276
Vapor® Byte	6%	120	354
Vapor® Cluster Dense	40%	759	2124
Vapor® Cluster Sparse	10%	203	577
Vapor® Cumula	18%	362	1012
Vapor® Element 605	6%	120	354
Vapor® Element 3212	32%	621	1734
Vapor® Element 3428	34%	656	1833
Vapor® Frequency	10%	203	577
Vapor® Liana	17%	342	959
Vapor® Gradients	17%	342	959
Vapor® Sky	19%	381	1065
Vapor® Pixel	19%	381	1065
Vapor® Syntax	6%	120	354
Vapor® Trail	24%	476	1328
Vapor® Shift X	53%	965	2723
Vapor® Transit	10%	203	577
Vapor® Bond	7%	141	410
Vapor® Verve	14%	283	797
VaporSoft® Cluster Dense	40%	759	2124
VaporSoft® Cora	68%	1176	3361
VaporSoft® Trail	24%	476	1328
VaporSoft® Cluster Sparse	10%	203	577


Product	% Open	18W Arktura Backlight Eco Lumen Output	65W Arktura Backlight Lumen Output
Trace® Curved	55%	994	2811
Trace® Slide	8%	162	466
Trace® Skew	62%	1095	3112
Trace® Slant	43%	808	2266
Trace® Straight	54%	979	2767
Particle® Ion	5%	99	297
Particle® Code	9%	182	522
Particle® Phase	4%	78	241
Particle® Fuse	4%	78	241
Particle® Urban	10%	203	577
Delta Drop® 2x4 Full Pattern	12%	241	653
Delta Drop® 2x4 Half Pattern	7%	134	390
Delta Drop® 4x4 Full Pattern*	14%	538	1514
Delta Drop® 4x4 Half Pattern*	7%	268	779

\* Delta Drop® 4x4 shown with two Light Fixtures per panel.


# Arktura InLine Lighting Specs

Makes it easy to seamlessly integrate linear lighting into the design of your paneling.

## Ceiling

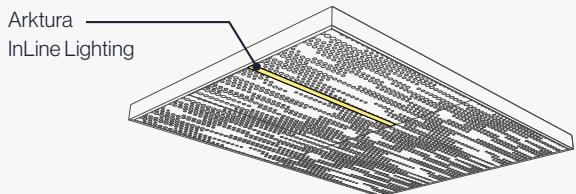

## Vertika® Wall

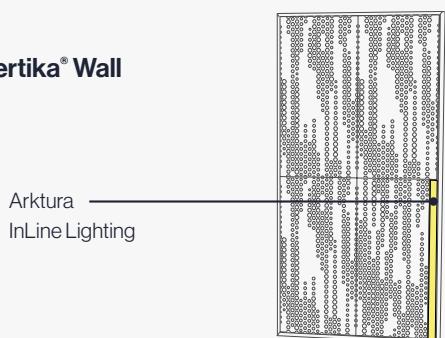


## Arktura InLine System

Description		W/ft	Fixture Watts	lm/ft	Fixture Lumens	LM/W*
4 Foot	Arktura InLine 3.5 W/ft - 4'	3.5	14	349	1396	102
	Arktura InLine 5W/ft - 4'	5	20	525	2100	114
	Arktura InLine 7W/ft - 4'	7	28	614	2457	98
	Arktura InLine 10W/ft - 4'	10	40	1021	4084	110
8 Foot	Arktura InLine 3.5W/ft - 8'	3.5	28	349	2792	102
	Arktura InLine 5W/ft - 8'	5	40	525	4200	114
	Arktura InLine 7W/ft - 8'	7	56	614	4914	98
	Arktura InLine 10W/ft - 8'	10	80	1021	8168	110

## Universal Specs


CRI	90+
Color Temperatures	3000K, 3500K, 4000K**
Operating Temperatures	-20C - +50°C (-4F - +122°F)
Dimming Options	TRIAC/Phase, ELV, MLV, 0-10V, When Paired with Arktura LED Driver
Cable	Factory Installed Plenum Rated CL3P Cable, 18AWG 4FT Cable
Environment	Indoor Locations Only
Markings	ETL Listed, Complies with UL 1598 & CSA C22.2#250.0:2021 Ed.5
Lifetime	L70 - 50,000 hours
Warranty	5 Years, Limited

## Elevations - Ceiling

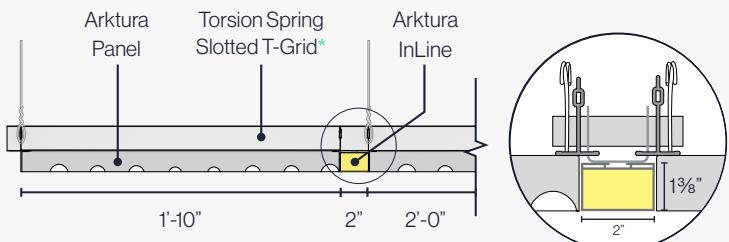


\*7301TS Prelude XL 12' HD Main Beam slotted for torsion spring.

## Top View - Wall

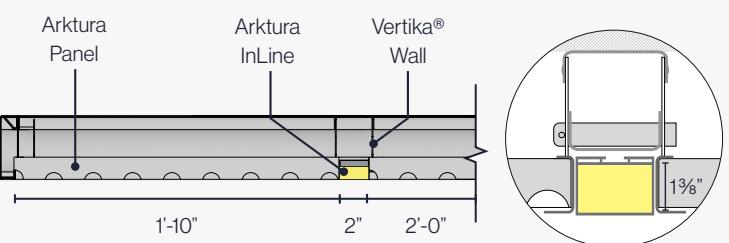

## Side - Length Options

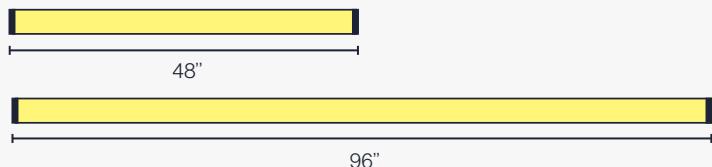


## Photometric

Located At Horizontal Angle = 0, Vertical Angle = 0

#1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)

#2 - Horizontal Cone Through Vertical Angle (0) (Through Max. Cd.)

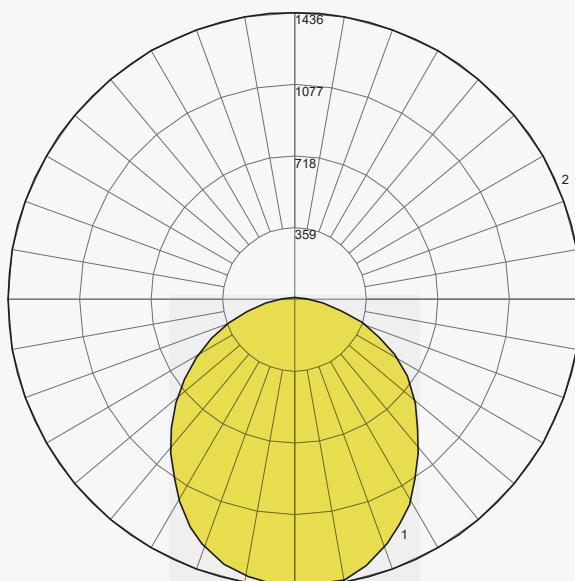

Illustrative images. Patterns may not match the product.

\* Efficiency at 3500K 90CRI

\*\* Consult factory for custom color temperatures.

# Product Line

## Design Options

Particle® also offers a growing library of design options. Particle® is available in 4 seamlessly tileable patterns.



PARTICLE® CODE



PARTICLE® FUSE



PARTICLE® ION



PARTICLE® PHASE



PARTICLE® URBAN