


# Soft Sound® Vivids

## Standard Finish

Material Thickness: 12 mm

Fire Rating: Class A

## Available Colors:



Nori



Tidal



Seafoam



Bamboo



Plum



Azalea



Sorbet



Buttercream



Cosmos



Blush

Product Variances | Variation in fiber and color and patterning may occur.

⚠ Due to the nature of non-woven materials, light may pass through Soft Sound® in any thickness or color. A translucent appearance is most apparent in lighter colors and thin material when a light source is present behind the material. Arktura makes no claims or warranties about the material performing as opaque in any circumstance. To verify a products performance for light transmittance, a mockup of the specific intended use is recommended.

# Soft Sound® Elementals

## Standard Finish


Material Thickness: 12 mm

Fire Rating: Class A

## Available Colors:



Ube




Baltic




Caspian



Cortez



Honey



Sienna



Truffle



Morel



Cypress



Pebble

Product Variances | Variation in fiber and color and patterning may occur.

⚠ Due to the nature of non-woven materials, light may pass through Soft Sound® in any thickness or color. A translucent appearance is most apparent in lighter colors and thin material when a light source is present behind the material. Arkтура makes no claims or warranties about the material performing as opaque in any circumstance. To verify a products performance for light transmittance, a mockup of the specific intended use is recommended.

# Soft Sound® Wood Textures

## Premium Finish


Material Thickness: 12 mm

Fire Rating: Class A

## Available Colors:



Soft Sound® core exposed on material edges and groove cuts helping bring an added layer of design depth to select systems.

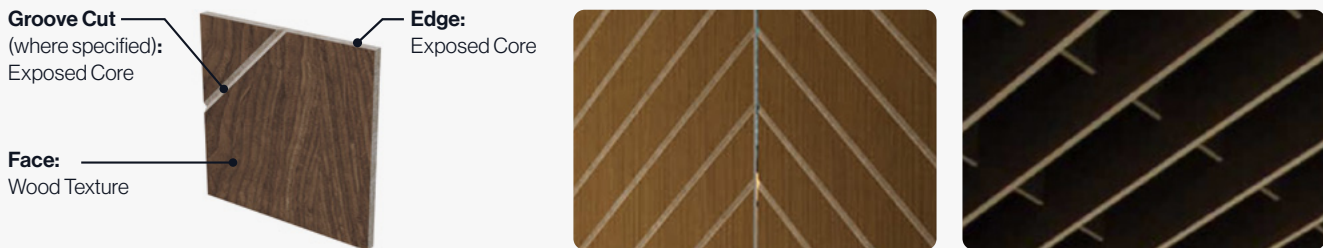

Product Variances | Variation in fiber and color and patterning may occur.

**i** As with natural wood, variation in color and grain is expected and grain will not align across panels.

**!** Due to the nature of non-woven materials, light may pass through Soft Sound® in any thickness or color. A translucent appearance is most apparent in lighter colors and thin material when a light source is present behind the material. Arktura makes no claims or warranties about the material performing as opaque in any circumstance. To verify a products performance for light transmittance, a mockup of the specific intended use is recommended.

# Soft Sound® Essentials

## Standard Finish

Material Thickness: 12 mm

Fire Rating: Class A


## Available Colors:




Snow  
LRV 78%



White  
LRV 82%



Marble  
LRV 53%




Heather Gray




Graphite



Carbon




Onyx




Sand



Taupe



Lemon  
LRV 55%



Tangerine




Apple




Whisper



Sky Blue




Denim



Kiwi

Product Variances | Variation in fiber and color and patterning may occur.

 Arktura's Light Reflectance Value (LRV) shown.

 Due to the nature of non-woven materials, light may pass through Soft Sound® in any thickness or color. A translucent appearance is most apparent in lighter colors and thin material when a light source is present behind the material. Arktura makes no claims or warranties about the material performing as opaque in any circumstance. To verify a products performance for light transmittance, a mockup of the specific intended use is recommended.

# Soft Sound® Product Matrix

Product	Wood	Essentials	Elementals	Vivids
Arborisa™	○	●	●	●
Atmosfera®	○	●	●	●
Atmosfera® Adaptive*	○	●	●	●
SoftFold®	○	●	●	●
SoftGrid®	○	●	●	●
SoftScreen®	○	●	●	●
SoftShapes™	○	●	●	●
Soft Sound® Backer Panels & Inserts	○	●	●	●
SoundAngle®	○	●	●	●
SoundBar®	○	●	●	●
SoundEdge®	○	●	●	●
SoundStar®	○	●	●	●
TriSoft®	○	●	●	●
VaporSoft®	○	●	●	●

● Standard    ○ Optional Colors (Upcharge for Finish)

Color Group	Thickness	Fire Rating
Wood	12mm	FR - Class A
Essentials	12 mm	FR - Class A
Elementals	12 mm	FR - Class A
Vivids	12 mm	FR - Class A

\* Atmosfera Pulse, Ripple, Fiora, and Lotus fins only available in metal

[i](#) See Soft Sound® specification for detailed information



# Soft Sound<sup>®</sup> Spec Sheet

## Arktura Soft Sound<sup>®</sup> - Wood Texture

### Fire Rating:

ASTM E84 Class A / CAN ULC S102

### Sound Absorption:

ASTM C423 for raw material

### 12mm:

NRC 0.35 (no air gap)

NRC 0.71 (50mm air gap)

NRC 0.80 (100mm air gap)

NRC 0.85 (200mm air gap)

\*results for raw material, see TrueNRC™ Testing Brochure for system results

### Environmentally Sustainable & Beneficial:

- Contains up to 60% Pre Consumer Recycled Content
- Low VOC product: no added formaldehyde
- Living Building Challenge Red List Free

### Cleaning & Handling

- Vacuum the surface of the material to remove dust accumulation.
- If a wet spill should occur, blot up the liquid as soon as possible with a dry cloth to avoid absorption.
- Soiled areas may be spot cleaned with warm water or a mild, dry cleaning solvent. Avoid excessive amounts of water and aggressive rubbing as this can change the surface appearance of the material.
- Ensure adequate ventilation if the product is likely to be subjected to excessive moisture.

### Project Conditions:

- All wet work must be complete and dry prior to installation. Avoid direct exposure of Soft Sound<sup>®</sup> to sunlight or warranty will be void. Installation shall be carried out where the temperature is between 40 degrees F and 90 degrees F. These temperature conditions must be maintained throughout the life of the product or warranty will be void.

### Soft Sound<sup>®</sup> Material Finish

- Soft Sound<sup>®</sup> acoustical material is produced by felting 100% PET plastic. In some colors, a beautiful heathering pattern becomes visible as a result of this traditional manufacturing process, and will result in natural variations in color and patterns from batch to batch and sheet to sheet.

# Soft Sound® Spec Sheet

## Arktura Soft Sound® - Essentials, Elementals & Vivids

### Fire Rating:

ASTM E84 Class A / CAN ULC S102

### Sound Absorption:

ASTM C423 for raw material

### 12mm:

NRC 0.45 (no air gap)

NRC 0.80 (50mm air gap)

NRC 0.80 (100mm air gap)

NRC 0.85 (200mm air gap)

\*results for raw material, see TrueNRC™ Testing Brochure for system results

### Environmentally Sustainable & Beneficial:

- Contains up to 60% Pre Consumer Recycled Content
- Low VOC product: no added formaldehyde
- Living Building Challenge Red List Free

### Cleaning & Handling

- Vacuum the surface of the material to remove dust accumulation.
- If a wet spill should occur, blot up the liquid as soon as possible with a dry cloth to avoid absorption.
- Soiled areas may be spot cleaned with warm water or a mild, dry cleaning solvent. Avoid excessive amounts of water and aggressive rubbing as this can change the surface appearance of the material.
- Ensure adequate ventilation if the product is likely to be subjected to excessive moisture.

### Project Conditions:

- All wet work must be complete and dry prior to installation. Avoid direct exposure of Soft Sound® to sunlight or warranty will be void. Installation shall be carried out where the temperature is between 40 degrees F and 90 degrees F. These temperature conditions must be maintained throughout the life of the product or warranty will be void.

### Soft Sound® Material Finish

- Soft Sound® acoustical material is produced by felting 100% PET plastic. In some colors, a beautiful heathering pattern becomes visible as a result of this traditional manufacturing process, and will result in natural variations in color and patterns from batch to batch and sheet to sheet.